




# KANO

Resilient Flooring

## LINE ECO

### Structure of Product

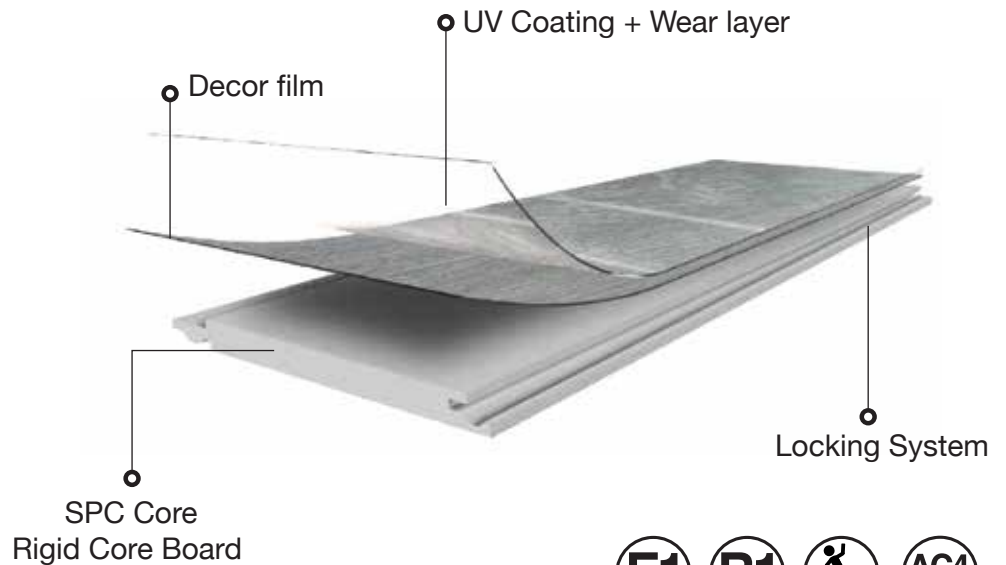

Specifications	Resilient Flooring Eco - Line
Features	Waterproof / Anti Slip / Wear Resistant / Fire Resistant / Noise Reduction
Advantages	Long Term Use / Easy Installation / Cost Saving / Eco Friendly
Size	1220 mm x 150 mm x 4mm
Wear Layer	0.4 mm (Domestic and general trafficked Comercial - Class 32)
Applications	Residential / Office / Hotel / Restaurant / Shopping Mall / Museum / Gym
Surface Treatment	Matt Finish with UV Coating
Packaging (per pack)	12 Planks / 2.196 m <sup>2</sup> / 17.5 Kg
Packaging (per pallet)	90 Packs / 197.64 m <sup>2</sup> / 1595 Kg
Installation Method	Locking System
Warranty	Residential: Up to 15 years - Commercial: Up to 5 years

Test Items	Testing Methods (Standards)	Test Results
Abrasion Resistance	EN 13329: 2016 (≥ 2.000 rounds)	3.100
Squareness of Plank	EN 13329: 2016 (≤ 0.20 mm)	0.12
Straightness of Plank	EN 13329: 2016 (≤ 0.30mm/m)	0.18
Fatness of Plank	EN 13329: 2016 (Width: ≤0.15%)	0.8
	EN 13329: 2016 (Length: ≤0.50%)	0.21
Openings between Planks	EN 13329: 2016 (≤ 0.15 mm)	0.5
Height difference between Planks	EN 13329: 2016 (≤ 0.10 mm)	0.08
Swelling In Thickness	EN 13329: 2016 (≤ 20%)	0.12
Surface Soundness	EN 13329: 2016 (≥ 1.0 MPa)	1.72
Dimensional variations for changes in relative humidity	EN 13329: 2016 (≤ 0.90 mm)	0.08
Formaldehyde Content	TCVN 7756-12: 2007 (≤0.1mg/100g)	Not detected
Ignitability of materials with 30s exposure time to flaming	ISO 11925-5: 2010	
Ignitability Occurs		Not detected
Presence of Flaming Droplets		Not detected

