KANO

Resilient Flooring



ECO - Line



15 years Gurantee














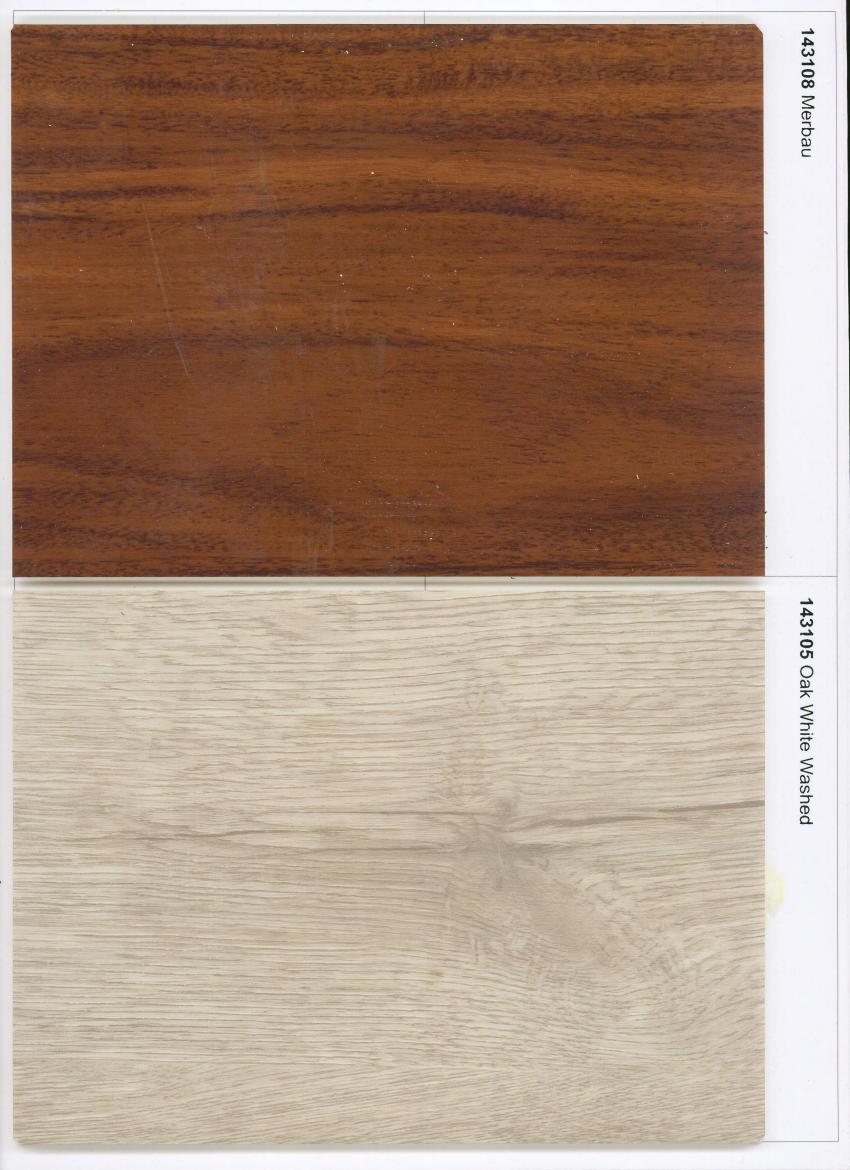





















| Specifications | Resilient Flooring Eco - Line | |
|------------------------|--|--|
| Features | Waterproof / Anti-slip / Wear-resistant / Fire-resistant / Noise reduction | |
| Advantages | Long-term use / Easy installation / Cost saving / Eco-friendly | |
| Size | 1220 mm x 150 mm x 4 mm | |
| Wear layer | 0.4 mm (Domestic and general trafficked Commercial - Class 32) | |
| Applications | Residential / Office / Hotel / Restaurant / Shopping Mall / Museum / Gym | |
| Surface treatment | Matt finish with UV coating | |
| Packaging (per pack) | 12 planks / 2.196 m ² / 17.5 kg | |
| Packaging (per pallet) | 90 packs / 197.64 m² / 1595 kg | |
| nstallation method | Välinge Click Lock system | |
| Warranty | Residential: Up to 15 years – Commercial: Up to 5 years | |

| Test Items | Testing Methods (Standards) | Test Results |
|--|---|--------------|
| Abrasion resistance | EN 13329: 2016 (≥ 2.000 rounds) | 3.100 |
| Squareness of plank | EN 13329: 2016 (≤ 0.20 mm) | 0.12 |
| Straightness of plank | EN 13329: 2016 (≤ 0.03mm/m) | 0.18 |
| Flatness of plank | EN 13329: 2016 (Width: ≤0.15%) EN 13329: 2016 (Length: ≤0.50%) | 0.08 0.21 |
| Openings between planks | EN 13329: 2016 (≤ 0.15 mm) | 0.05 |
| Height difference between planks | EN 13329: 2016 (≤ 0.10 mm | 0.08 |
| Swelling in thickness | EN 13329: 2016 (≤ 20%) | 0.12 |
| Surface soundness | EN 13329: 2016 (≥ 1.0 MPa) | 1.72 |
| Dimensional variations for changes in relative humidity | EN 13329: 2016 (≤ 0.90 mm) | 0.08 |
| Formaldehyde content | TCVN 7756-12: 2007 (≤0.1mg/100g) | Not detected |
| 30s exposure time to flaming: | ISO 11925-5: 2010 | |
| Ignitability occurs | 130 11323-3, 2010 | Not detected |
| Presence of flaming droplets | | Not detected |

KANO

Resilient Flooring ECO - Line

Luxury Resilient Flooring – KANO is researched and developed by leading experts in the flooring material technology with the following criteria: long life cycle, natural wooden color, diversified designs and most importantly environmental friendly. Our product is made from virgin Poly Vinyl Chloride (PVC) and Nano stone powder, so it is 100% waterproof and water-repellent. The installation is easy and convenient thanks to the Belgian click system technology.

The latest "Emboss-In-Register" technology makes flooring planks natural, elegant and attractive. In addition, the flooring is fire resistant, anti-abrasive (AC4) and anti- scratch. Especially the vinyl layer along with UV coating surface as they keep the flooring permanently colorful. Interestingly, KANO Floor does not get bent at normal temperatures from -10 to 50 degrees Celsius and is perfectly suited for high-traffic areas such as commercial centers, supermarkets, restaurants, hotels, gyms, or wet places such as baths, kitchens ...

